### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization

International Bureau



# ? [ENTERTINET | FORTINE 110] BANK ENTERT | 110] BANK ENTERT | 110]

(43) International Publication Date 22 January 2004 (22.01.2004)

PCT

#### (10) International Publication Number WO 2004/006761 A1

(51) International Patent Classification7: 5/00, 5/20

A61B 5/03,

(21) International Application Number:

PCT/NL2003/000508

(22) International Filing Date:

10 July 2003 (10.07.2003)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

1021054

12 July 2002 (12.07.2002)

- (71) Applicant (for all designated States except US): BEST INTERNATIONAL BEHEER MEDICAL [NL/NL]; Schoenaker 10e, NL-6641 SZ Beuningen (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): DLJKMAN, Gerrat [NL/NL]; Oldenzaalsestraat 1200, NL-7524 RJ Enschede (NL).


- (74) Agent: PRINS, A., W.; c/o Vereenigde, Nieuwe Parklaan 97, NL-2587 BN Den Haag (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: UNIVERSAL MEASURING DEVICE FOR MEDICAL APPLICATION

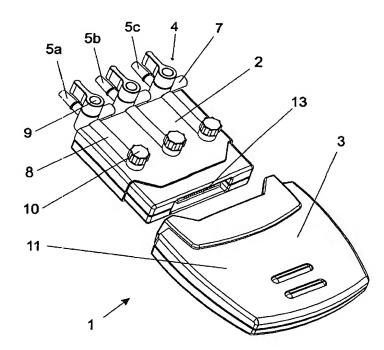

(57) Abstract: Measuring device for medical application, comprising a first part provided with measuring means for measuring data of a patient, and a second part provided with communication means for sending the data, wherein the first part can be releasably connected to the second part, characterized in that the communication means are wireless.



10

15

20

25

30

35

and

#### UNIVERSAL MEASURING DEVICE FOR MEDICAL APPLICATION

The invention relates to a measuring device for medical application, comprising a first part provided with measuring means for measuring data of a patient, and a second part provided with communication means for sending the data, wherein the first part can be releasably connected to the second part.

Known from the international patent application WO 02/07595 is a connector unit for receiving a disposable catheter for performing urological measurements. In the catheter is arranged a pressure sensor for measuring diverse pressure-related data. The connector unit can be connected by means of electrical wiring to peripheral equipment for the purpose of sending the data thereto.

It is a general object of the invention to provide a universal measuring device for medical application with an increased number of possible uses.

The measuring device according to the invention has the feature that the communication means are wireless.

The possible uses are considerably increased through the application of wireless communication, because of the fact, among others, that the patient and the peripheral equipment do not have to be located in the same space. In addition, the measuring device according to the invention is extremely easy to use, which increases user convenience to a significant extent. The absence of wires moreover increases the freedom of movement of the patient to a significant degree.

In a first preferred embodiment the first part is a disposable article. The measuring device is hereby based on the principle of once-only use or use by one patient at most, and thereby satisfies the highest requirements in respect of hygiene.

In a second preferred embodiment the first part is embodied as a cassette, and the second part is embodied as cassette holder. The measuring device according to the invention is compact, thereby further enhancing user convenience.

The invention will be elucidated hereinbelow on the basis of embodiments and with reference to the drawings.

In the drawings:

Figure 1 shows in perspective view a first preferred embodiment of the measuring device according to the invention;

Figure 2 shows the preferred embodiment of figure 1 with the parts taken apart;

Figure 3 shows the preferred embodiment of figure 1 with connections in a practical situation.

Corresponding components are designated in the figures with the same reference numerals.

10

15

20

25

30

35

Figure 1 shows a measuring device 1 comprising a cassette 2 which is received in a cassette holder 3. Cassette 2 is provided with measuring means, which in this preferred embodiment are adapted to perform liquid pressure measurements in the field of urology. The measuring means comprises three catheters 4 which are each provided with three ports, i.e. a first port 5a, 5b, 5c for connection of a catheter tube 6a, 6b, 6c (see figure 3), a second venting port 7 and a third port 8 in which is arranged a pressure sensor (not shown). The catheters are further provided with a two-way tap 9 and a non-return valve 10. Such a catheter is described at length in the above stated international patent application WO 02/07595 which is interpolated herein through reference.

It is noted in this respect that the catheters 4 are preferably integrated into the cassette. The cassette is provided with recesses on which a close-fitting casing is placed in liquid-tight manner, the recesses and casing together forming the catheters 4. The components of the catheters and the function thereof corresponds however to that of the known catheters, to which reference has been made above.

Cassette 2 can be connected releasably to holder 3 by means of a connector 13, this being illustrated in figure 2. It is noted that many types of suitable connector are available commercially for releasable connection of the cassette and the holder.

During use the cassette 2 comes into contact with bodily fluids of the patient and is intended as a disposable article. The cassette is preferably provided with a power supply, for instance in the form of batteries. In order to prevent reuse, the lifespan of the power supply is geared to the anticipated measuring time required by the measuring means. The lifespan is preferably chosen such that the intended measurement can be performed only once on a patient. The cassette is sealed liquid-tight.

Holder 3 is provided with wireless communication means. The communication means comprise at least one transmitter, for instance a radio frequency transmitter 11. All peripherals with a suitable receiver can receive and/or process the data sent by the holder. Examples of such peripherals are computers, such as personal computers, including laptops, as well as electronic agendas, the so-called palmtop. If desired, the communication means can also comprise a receiver, preferably a radio frequency receiver. Suitable wireless communication means are per se known and available commercially. Use is preferably made of a protocol for monitoring the completeness and/or reliability of the received data. Such protocols are per se known and available commercially in the form of software and/or hardware. An example of suitable wireless communication means is the Blue Tooth® system of IBM.

Holder 3 is further provided with electronics for reading the measurement values of the pressure sensor and converting thereof into data suitable for transmission. Holder 3 comprises for this purpose means for digitizing the data. The holder can also comprise a pre-amplifier. Such electronics are commercially available and therefore known to a skilled person in the field.

10

15

20

Holder 3 is also provided with means for attaching the holder to a patient, such as adhesive electrodes (not shown), and is suitable for stationary and ambulatory use. Holder 3 is suitable and intended for reuse. It can be cleaned simply in usual manner, for instance with a wet cloth. The holder can be made splashproof by liquid-tight sealing of the connector for the cassette.

Figure 3 shows measuring device 1 in a practical situation. A catheter tube 6a for rectal measurement of the abdominal pressure is connected to port 5a. A catheter tube 6b for simultaneously measuring the pressure in the urethra and in the bladder is connected to ports 5b and 5c.


The measuring device according to the invention is described in the context of urological applications. It will however be apparent to a skilled person in the field that the measuring means can if desired be replaced by diverse other measuring means for use in other fields of medical science. An example of such measuring means are means for measuring electrophysiological data, for instance measuring electrodes. The measuring device is then suitable for performing a general electrophysiological examination, such as ECG measurements and gastro-enterological measurements. The skilled person will have no difficulty whatever in also using other, per se known measuring means in combination with the above described measuring device.

In figure 3, in addition to the catheters, two measuring electrodes 12 are connected to cassette 2 to perform ECG measurements.


The invention is of course not limited to the shown and described embodiment but comprises any embodiment falling within the scope of the appended claims as seen in the light of the accompanying drawings.


#### CLAIMS

- 1. Measuring device for medical application, comprising a first part provided with measuring means for measuring data of a patient, and a second part provided with communication means for sending the data, wherein the first part can be releasably connected to the second part, characterized in that the communication means are wireless.
- 10 2. Measuring device as claimed in claim 1, wherein the first part is a disposable article.
  - 3. Measuring device as claimed in claim 1 or 2, wherein the first part is embodied as a cassette, and the second part is embodied as cassette holder.

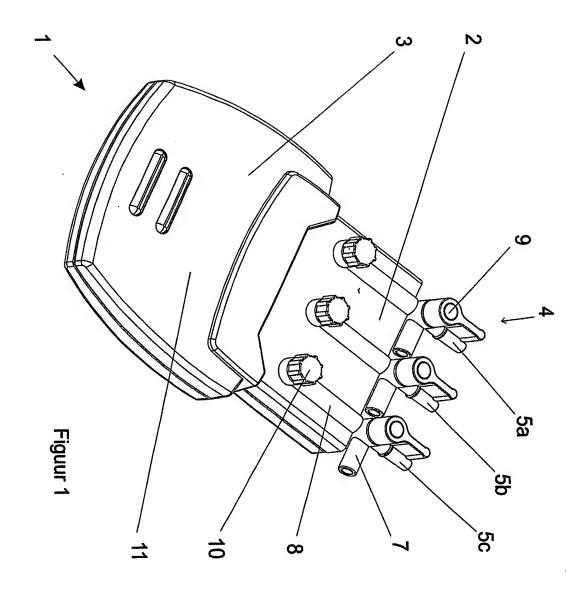



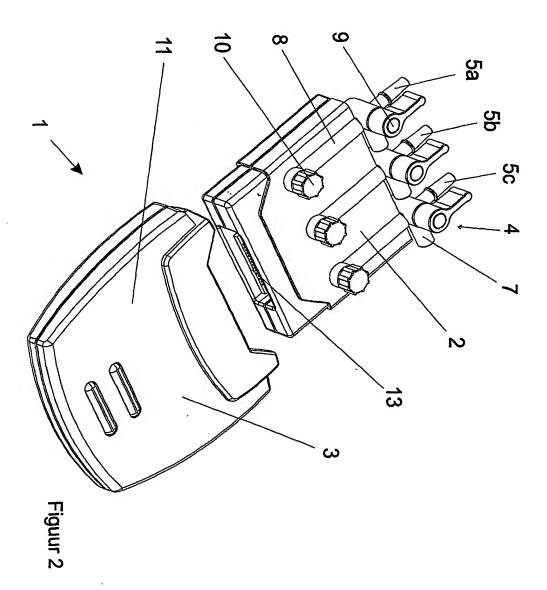

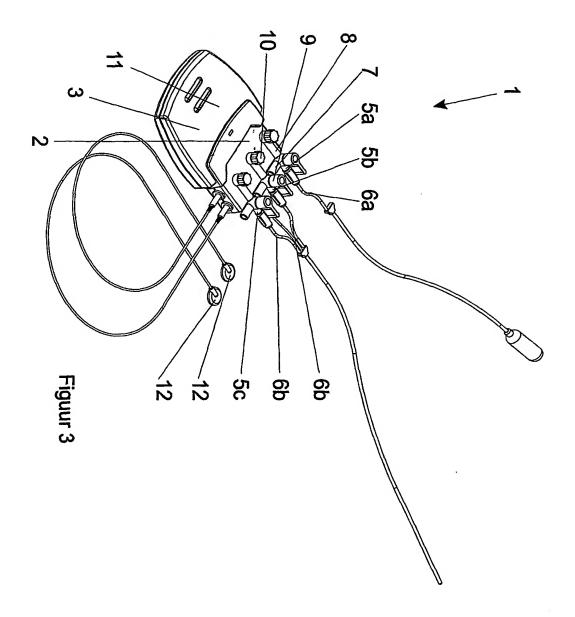

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61B5/03 A61B5/00

C. DOCUMENTS CONSIDERED TO BE RELEVANT

A61B5/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols) IPC  $\,7\,$  A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.			
Х	WO 02 22006 A (NEXAN LTD.) 21 March 2002 (2002-03-21) the whole document	1-3			
X	WO 02 22010 A (NEXAN LTD.) 21 March 2002 (2002-03-21) page 8, line 6 -page 9, line 25; figures 1-5				
X	US 5 479 934 A (IMRAN) 2 January 1996 (1996-01-02) column 1, line 40 -column 2, line 18; figures 1-17				
X	WO 01 17425 A (TENSYS MEDICAL INC.) 15 March 2001 (2001-03-15) page 10, line 28 - line 35 abstract; figures 1-3	1,2			
	_/				
· γ χ ····Funt	ter documents are listed in the continuation of box Crown	d in annex.			
"A" docume consid "E" earlier of filing of docume which citation other a	nt which may throw doubts on priority claim(s) or involve an inventive step when the cannot be considered to stabilish the publication date of another or other special reason (as specified)  ent referring to an oral disclosure, use, exhibition or document is combined with one or interest.	th the application but theory underlying the claimed invention oot be considered to document is taken alone a claimed invention inventive step when the nore other such docu—			

Form PCT/ISA/210 (second sheet) (July 1992)

Name and mailing address of the ISA

Date of the actual completion of the international search

Ruropean Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340–2040, Tx. 31 651 epo nl, Fax: (+31-70) 340–3016

17 October 2003

Date of mailing of the international search report

29/10/2003

Authorized officer

Hunt, B



In Milication No PCT/NL 03/00508

	. PC1/NL 03/00508		
	tion) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with Indication, where appropriate, of the relevant passages	Relevant to claim No.	
Х	WO 96 14813 A (C & M INVESTMENT NOMINEES PTY. LTD.) 23 May 1996 (1996-05-23) page 5, line 31 -page 7, line 24; figure 3	1-3	
A	DE 198 51 275 C (PVB MEDIZINTECHNIK GMBH & CO. KG) 10 February 2000 (2000-02-10) the whole document	1	
A	EP 0 919 182 A (PVB MEDIZINTECHNIK GMBH & CO. KG) 2 June 1999 (1999-06-02) the whole document	1	
<b>4</b> 4.			
	· ·	e ;	

mation on patent family members

Inte Ication No PCT/NL 03/00508

Patent document dted in search report	Publication date		Patent family member(s)	Publication date
WO 0222006	A 21-03-2002	AU WO	8607901 A 0222006 A1	26-03-2002 21-03-2002
WO 0222010	A 21-03-2002	AU WO US	8785601 A 0222010 A1 2002099277 A1	26-03-2002 21-03-2002 25-07-2002
US 5479934	A 02-01-1996	AU AU AU CA EP JP US	667199 B2 2724892 A 5468696 A 5468796 A 2082092 A1 0541393 A1 5261076 A 5452718 A 5345934 A	14-03-1996 13-05-1993 01-08-1996 01-08-1996 09-05-1993 12-05-1993 12-10-1993 26-09-1995 13-09-1994
WO 0117425	A 15-03-2001	AU EP JP WO	7107600 A 1211975 A2 2003508145 T 0117425 A2	10-04-2001 12-06-2002 04-03-2003 15-03-2001
WO 9614813	A 23-05-1996	AU WO AU AU	690901 B2 9614813 A1 6339394 A 8135294 A	07-05-1998 23-05-1996 01-12-1994 06-06-1996
DE 19851275	C 10-02-2000	DE	19851275 C1	10-02-2000
EP 919182	A 02-06-1999	DE US AU EP	19851276 A1 6139503 A 3229599 A 0919182 A1	10-06-1999 31-10-2000 30-11-2000 02-06-1999